
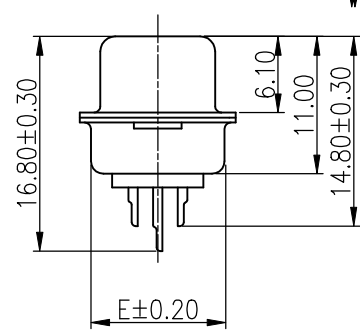
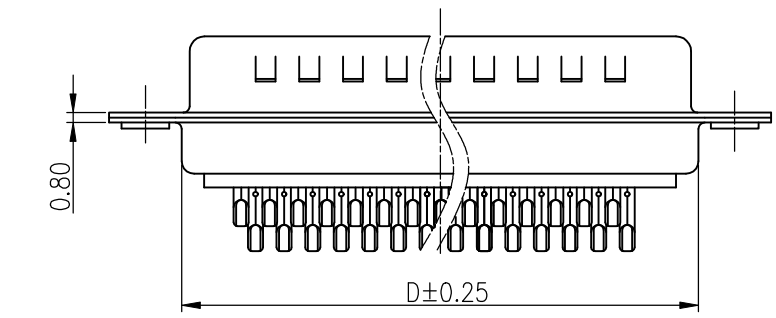


RoHS Compliant

REV.	ECN NO	LTR	DESCRIPTION	REVISER	DATE
A/0			图面整理	LJR	2008.01.09
A/1		△	依客户要求增加尺寸标注	ANDY	2009.11.19

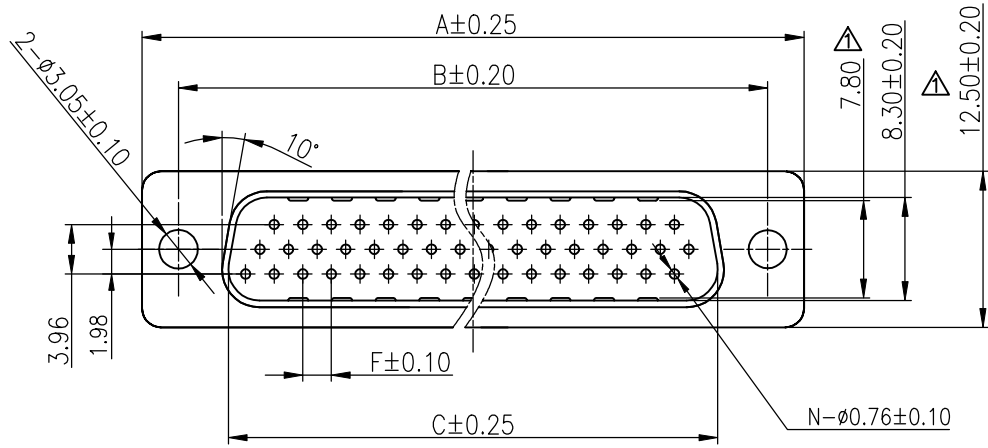


Material:
 1.Insulator:PBT+30 %Glass Fiber (UL94V-0)
 2.Contact:Brass C2680 H65
 3.Contact Plated:gold plated over Nickel
 4.Shell:SPCC-SD
 5.Shell Plated:Cu60u"/Ni80-120u" and Cu60u"/Sn100-120u"
 SPECIFICATION:

1.Contact Current Rating:5 AMPS
 2.Insulation Resistance:1000M Ohm MIN. AT 500V DC
 3.Dielectric Withstanding Volt:AC 500V/min.R.M.S.
 4.Operation Temperature:-55°C ? +105°C
 How to order

304-XX-M-X-X-X-X

PIN 数
 颜色规格
 B:兰色
 K:黑色
 W:白色
 端子电镀
 1:G/F 1u"
 2:半金5u"
 3:半金10u"
 4:半金15u"
 6:半金30u"
 铆钉型式
 A:前铆实心螺母
 B:后铆空心螺母
 X:无铆钉
 铁壳电镀
 A:铁壳前镍后锡8H~12H
 B:前镍后雾锡12H
 C:前镍后锡24H
 D:前镍后锡48H
 E:前镍后锡72H

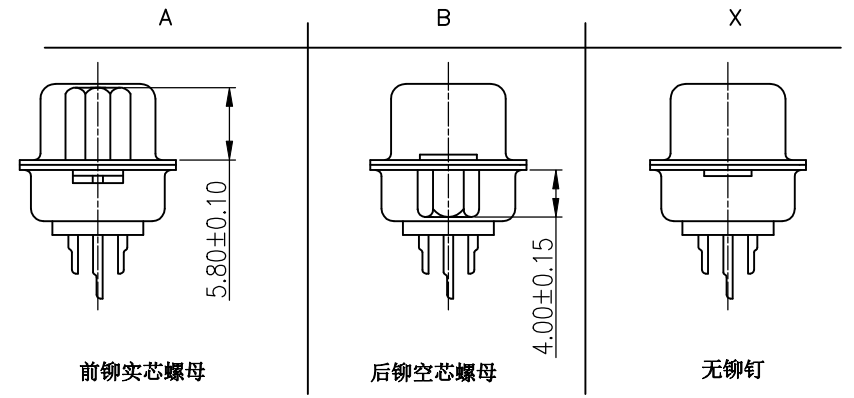

DIM \ PIN	HDD26P	HDD44P	HDD62P
A	39.20	53.05	69.40
B	33.30	47.05	63.50
C	25.25	38.95	55.40
D	27.50	41.10	57.30
E	10.70	10.70	10.80
F	2.29	2.29	2.41

图号 (DWG NO)	G-304-S1-5	单位 (UNIT):	MM	显赫电子科技有限公司 XianHe Electronic Technology co., ltd. TEL:0769-89138899 FAX:0769-89100950
型号 (MODEL NO)		比例 (SCALE):	1:1	
版次 (REV):	A/1	页次 (PAGE):	1/1	品名 (ITEM NO) HDD MALE 传统焊线式 料号 (PART NO) 304-XX-M-X-X-X-X
设计 (DESIGN)	Andy	未注公差 TOLERANCE UNSPECIFIED X.X ± 0.38 X.XX ± 0.20 X.XXX ± 0.10 X' ± 5' X.X' ± 2'		
审核 (CHECKED)				
核准 (APPROVED)				