
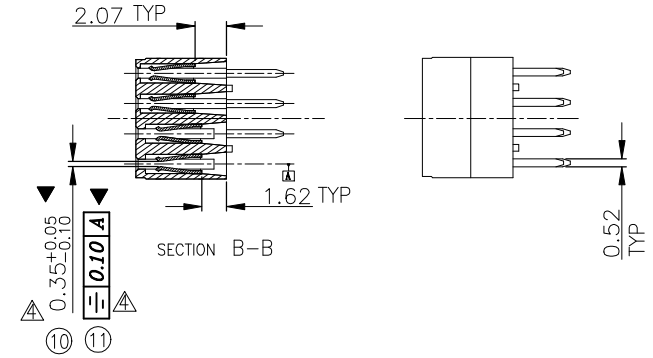
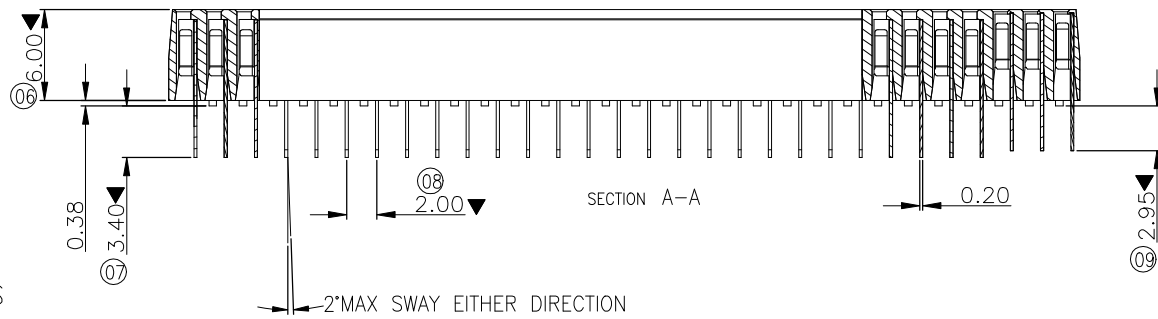
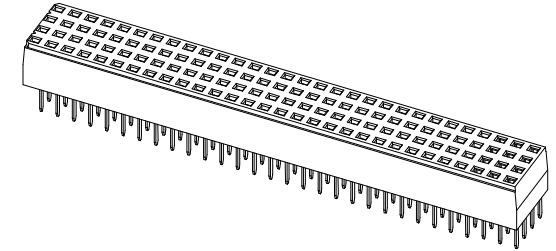


RoHS Compliant

REV.	ECN NO	LTR	DESCRIPTION	REVISER	DATE
A/1			MODIFY_THE_NAME	KEN	13.04.08
A/2			CANCEL_THE_LOGO	KEN	13.07.15
A/3	20131128001		CANCEL_THE_KINK	KEN	13.07.15
A/4		▲	增加弹高尺寸管控	WB	2022.09.14

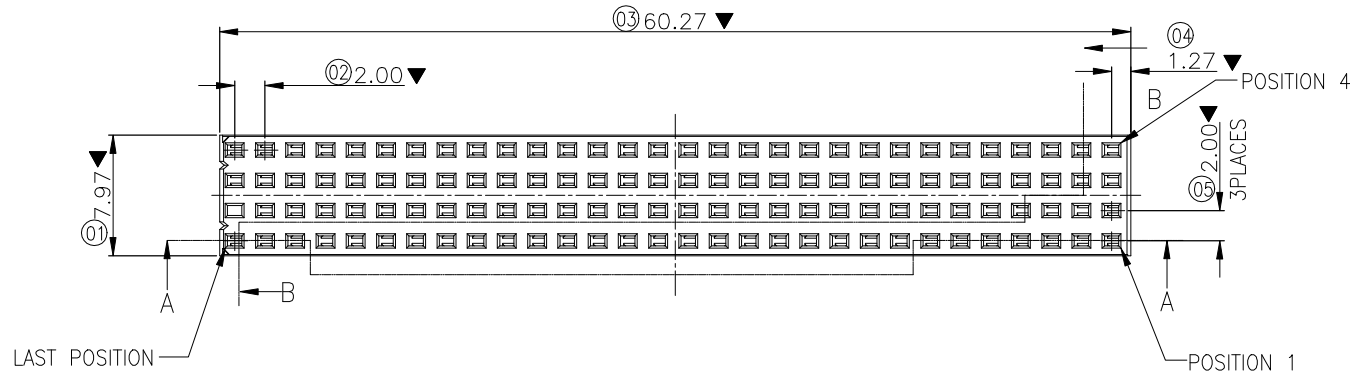

NOTES

- 1.Electrical  
Current Rating: 3A  
Contact Resistance: 15mΩ Max.  
Insulation Resistance: 500MΩ Min.  
Dielectrical Withstanding Voltage: 1000VAC/1Minute Min.  
Operating temperature: -65°C to +105°C.
- 2.Mechanical  
Mating: Force: 69.4N Max.  
Unmating: Force: 69.4N Max.  
Durability: 500 cycles at a speed of 200 cycles/hour.  
Contact Retention Force: 5N Min.
- 3.Maximum allowable bow: 0.075mm.
- 4.Locking leads to be on positions 1,2,3,4,57,58,59,60,117,118 and 120.
- 5.Polarize by pulling position 119.
6. THE DIMENSIONS WITH "▼" MARK ARE CRITICAL AND SHOULD BE CONTROLLED BY QC.

2	Housing	1	LCP E130i,UL94V-0,Black.		
1	Contact	119	C5191-H,T=0.20mm.	Contact Area: 30U" Gold over 50U" Nickel. Tail: 200U"Matte Tim over 50U" Nicker.	
No.	Part Name	Q'ty	Material	Finishing	Remark
图号 (DWG NO)	G-359-S2-2	单位 (UNIT):	MM	<b>显赫电子科技有限公司</b> XianHe Electronic Technology co., ltd. TEL:0769-89138899 FAX:0769-89100950	
类别 (DWG TYPE)	ENG DWG	比例 (SCALE):	1:1		
版次 (REV):	A/4	页次 (PAGE):	1/1	品名 (ITEM NO) RX3i BACKPLANE CONNECTOR SKT 120pin 排母 (42G8611-0012) LCP P:2.00mm 半金镀锡30u" 环保 料号 (PART NO) 359120MK6A0	
设计 (DESIGN)	KEN	未注公差 TOLERANCE UNSPECIFIED .XX ± 0.15 X.XX ± 0.10 X.XXX ± 0.05 X' ± 2' X.X' ± 1'			
审核 (CHECKED)					
核准 (APPROVED)					